



AHM

BUILDING MATERIALS TRADING LLC

CATALOG



ABOUT **US**

A H M Building Materials Trading LLC is a leading and trusted provider of wholesale and retail solutions for building materials, hardware tools, consumables, safety equipment, rigging products, and more.

OUR VISION

- Preferred partner for construction and industrial businesses
- Offering high-quality products and exceptional service
- Driving client success and growth
- Fostering trust, transparency, and value in client relationships

OUR MISSION

- Delivers a comprehensive range of building materials, hardware tools, safety gear, and essential products
- Meet diverse customer needs
- Provide high-quality products
- Offer expert guidance
- Simplify the procurement process
- Empower businesses to thrive in their industries

INDEX


RIGGING EQUIPMENT

Wire Ropes
Chains
Flat Polyester Sling
Clevis Sling Hook
Hook Latch, Zinc Plated Steel Or Stainless Steel
Grade 80 Connecting Link European Type
Master Link
Stainless Steel Swivel Eye And Eye
Stainless Steel Duplex Clip
Galv Turn Buckle
D Shackle Screw Pin
Stainless Steel Twist Shackle
Grade 80 Clevis Grab Hook
Plastic Chain
Die Casting Single Pulley With Swivel
Drop Forged Wire Rope Clip, H.D.G
Stainless Steel Wire Rope Clip
Standard Type Thimble Zinc Plated
Ring Bolt
Eye Nut
Fist Grip Clips
Stainless Steel "C" Link
Welded Round Ring, Zinc Plated
Snap Hook, Zinc Plated
Ploythene (Pe) And Polypropylene (Pp) Rope 3 Strands
Eye Self Locking Safety Hook

RIGGING EQUIPMENT




WIRE ROPES

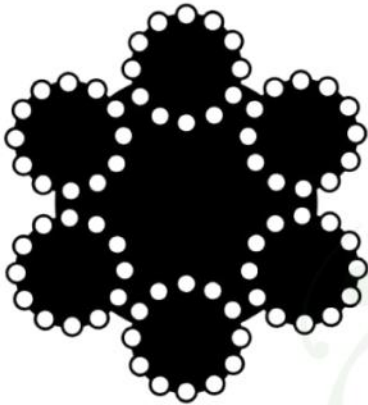

6 X 12 FC

NOMINAL TENSILE STRENGTH

NOMINAL DIAMETER (MM)	APPROX WEIGHT (KG/100M)	MINIMUM BREAKING STRENGTH (kN)	
		1570 N/mm ²	1770 N/mm ²
2	1		1.48
3	2.26		3.33
4	4.02		5.92
5	6.28		9.25
6	9.04		13.3
7	12.3		18.1
8	16.1	21	23.7
9	20.3	26.6	30
10	25.1	32.8	37
12	36.1	47.3	53.3
14	49.2	64.3	
16	64.3	84	

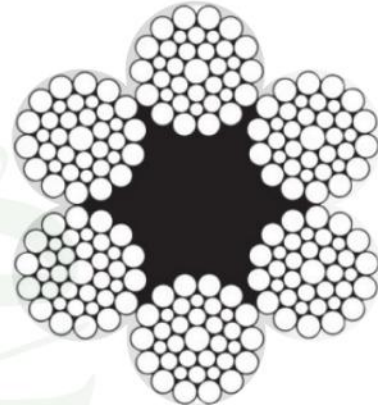

6 X 36 FC

NOMINAL TENSILE STRENGTH

NOMINAL DIAMETER (MM)	APPROX WEIGHT (KG/100M)	MINIMUM BREAKING STRENGTH (kN)	
		1570 N/mm ²	1770 N/mm ²
12	54.7	74.7	84
14	74.5	101	114
16	97.3	133	149
18	123	168	189
20	152	203	233
22	184	250	282
24	219	298	336
26	257	340	394
28	298	405	457
30	342	466	525
32	389	530	598
34	439	598	675

RIGGING EQUIPMENT



CHAINS



GRADE 80 CHAIN



GI CHAIN

DIA (MM)	PITCH (MM)	INSIDE WIDTH (MM)	OUTSIDE WIDTH (MM)	NET WEIGHT (KG/MTR)
8	24	10.8	26.8	1.4
10	30	14	34	2.2
13	39	17.5	43.5	3.8
16	48	21.5	53.5	7.3
20	60	27	67	9
22	66	30	74	10.9
26	78	35	87	15.2
32	96	40	104	23

SIZE (MM)	OD (MM)	ID (MM)	NET WEIGHT (KG/MTR)
6	36*21	26*11	20
8	51*38	37*14	35
10	55*33	37*15	52
12	65*40	42*18	84
16	92*54	63*24	142
20	112*67	76*31	168
22	136*79	93*36	225
24	155*92	110*44	270
32	210*110	162*48	540

RIGGING EQUIPMENT



FLAT POLYESTER SLING



WEBBING WIDTH	PLY	SWL/WLL	STRAIGHT LIFT 100%	BASKET LIFT 100%	140% 7-45'	CHOKER LIFT 80%	100% 45-60'
25MM	SINGLE PLY	500KG	500KG	1000KG	700KG	400KG	500KG
	DOUBLE PLY	1000KG	1000KG	2000KG	1400KG	800KG	1000KG
	THREE PLY	1500KG	1500KG	3000KG	2100KG	1200KG	1500KG
	FOUR PLY	2000KG	2000KG	4000KG	2800KG	1600KG	2000KG
50MM	SINGLE PLY	1000KG	1000KG	2000KG	1400KG	800KG	1000KG
	DOUBLE PLY	2000KG	2000KG	4000KG	2800KG	1600KG	2000KG
	THREE PLY	3000KG	3000KG	6000KG	4200KG	2400KG	3000KG
	FOUR PLY	4000KG	4000KG	8000KG	5600KG	3200KG	4000KG
75MM	SINGLE PLY	1500KG	1500KG	3000KG	2100KG	1200KG	1500KG
	DOUBLE PLY	3000KG	3000KG	6000KG	4200KG	2400KG	3000KG
	THREE PLY	4500KG	4500KG	9000KG	6300KG	3600KG	4500KG
	FOUR PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
100MM	SINGLE PLY	2000KG	2000KG	4000KG	2800KG	1600KG	2000KG
	DOUBLE PLY	4000KG	4000KG	8000KG	5600KG	3200KG	4000KG
	THREE PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
	FOUR PLY	8000KG	8000KG	16000KG	11200KG	6400KG	8000KG
125MM	SINGLE PLY	2500KG	2500KG	5000KG	3500KG	2000KG	2500KG
	DOUBLE PLY	5000KG	5000KG	10000KG	7000KG	4000KG	5000KG
	THREE PLY	7500KG	7500KG	15000KG	10500KG	6000KG	7500KG
	FOUR PLY	10000KG	10000KG	20000KG	14000KG	8000KG	10000KG
150MM	SINGLE PLY	3000KG	3000KG	6000KG	4200KG	2400KG	3000KG
	DOUBLE PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
	THREE PLY	9000KG	9000KG	18000KG	12600KG	7200KG	9000KG
	FOUR PLY	12000KG	12000KG	24000KG	16800KG	9600KG	12000KG
200MM	SINGLE PLY	4000KG	4000KG	8000KG	5600KG	3200KG	4000KG
	DOUBLE PLY	8000KG	8000KG	16000KG	11200KG	6400KG	8000KG
	THREE PLY	12000KG	12000KG	24000KG	16800KG	9600KG	12000KG
	FOUR PLY	16000KG	16000KG	32000KG	22400KG	12800KG	16000KG
250MM	SINGLE PLY	5000KG	5000KG	10000KG	7000KG	4000KG	5000KG
	DOUBLE PLY	10000KG	10000KG	20000KG	14000KG	8000KG	10000KG
	THREE PLY	15000KG	15000KG	30000KG	21000KG	12000KG	15000KG
	FOUR PLY	20000KG	20000KG	40000KG	28000KG	16000KG	20000KG
250MM	SINGLE PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
	DOUBLE PLY	12000KG	12000KG	24000KG	16800KG	9600KG	12000KG
	THREE PLY	18000KG	18000KG	36000KG	25200KG	14400KG	18000KG
	FOUR PLY	24000KG	24000KG	48000KG	33600KG	19200KG	24000KG



RIGGING EQUIPMENT



CLEVIS SLING HOOK

CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)
8	2.00
10	3.15
13	5.30
16	8.00
20	12.5
22	15.00



EYE SLING HOOK WITH LATCH

CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)
8	2.00
10	3.15
13	5.30
16	8.00
20	12.5
22	15.00
26	21.20
32	31.50



RIGGING EQUIPMENT



HOOK LATCH, ZINC PLATED STEEL OR STAINLESS STEEL



HOOK SIZE(TON)		TOP WIDTH	END WIDTH	O.L	N.W.
CARBON STEEL	ALLOY STEEL	INCH	INCH	INCH	LBS
1/2	3/4	0.36	0.51	1.30	0.02
3/4	1	0.41	0.59	1.46	0.02
1	1-1/2	0.41	0.67	1.84	0.02
1-1/2	2	0.49	0.75	1.84	0.03
2	3	0.49	0.87	2.02	0.03
3	4-1/2	0.63	1.00	2.41	0.06
5	7	0.71	1.42	2.99	0.11
7-1/2	11	0.79	1.57	3.68	0.17

CLEVIS LINK

W.L.L (TON)	SIZE(MM)
2.00	8
3.15	10
5.30	13
8.00	16



RIGGING EQUIPMENT



GRADE 80 CONNECTING LINK EUROPEAN TYPE

SIZE mm	W.L.L. ton	N.W. kg
5-6	1.00	0.095
6-7	1.20	0.14
7-8	2.00	0.20
10	3.20	0.38
13	5.40	0.76
16	8.20	1.10
18-20	12.50	1.80
22	15.25	3.20
26	21.25	4.50
32	32.20	9.00



SHORTENER LINK

W.L.L (TON)	SIZE(MM)
2.00	8
3.15	10
5.30	13
8.00	16
12.50	20
15.00	22



RIGGING EQUIPMENT



MASTER LINK

W.L.L (TON)	SIZE(MM)
1.6	6
2.12	8
3.15	10
5.30	13
8.00	16
11.20	18
21.20	22
31.50	26



MASTER LINK ASSEMBLY

W.L.L (TON)	SIZE(MM)
3.15	6
4.25	8
6.70	10
8.00	12
11.20	13
17.00	16
23.60	20
31.50	22



RIGGING EQUIPMENT



SS SWIVEL EYE AND EYE

SIZE mm	W.L.L. kgs	O.L. mm	N.W. kg
3/16	300	2-5/16	0.04
1/4	600	2-9/16	0.05
5/16	1100	3-5/8	0.12
3/8	1540	4-5/8	0.25
1/2	2640	6	0.62
5/8	4750	7-3/8	0.95
3/4	7100	8-1/2	2.08
7/8	9600	9-1/4	2.25
1	11900	11	4.45



JAW END SWIVEL

W.L.L (TON)	SIZE(MM)
1.02	10
1.63	12
2.36	16
3.27	19
4.54	22
5.67	25



RIGGING EQUIPMENT



STAINLESS STEEL DUPLEX CLIP

SIZE mm	b mm	d mm	h mm	i mm	N.W. kg/100PCS
2	4.0	M3.5	5.0	30.0	1.0
3	7.0	M3.5	7.0	35.0	1.3
4	8.0	M4.5	7.5	40.0	2.3
5	10.0	M5.0	8.0	50.0	2.8
6	12.0	M6.0	10.0	60.0	5.5
8	17.5	M7.5	12.0	75.0	9.6
10	21.0	M9.5	16.0	94.0	19.5



U.S. TYPE 6063 ALUMINIUM SLEEVE

SIZE mm	N.W. kg/100pcs
1/16	0.05
5/64	0.07
3/32	0.15
1/8	0.30
5/32	0.40
3/16	0.70
7/32	0.95
1/4	1.00
9/32	1.40
5/16	2.20
3/8	3.00
7/16	6.00
1/2	8.40
5/8	11.00
3/4	27.50
7/8	28.00
1	41.00



RIGGING EQUIPMENT



GALV TURN BUCKLE

THICKNESS (MM)	TAKE UP (MM)	NET WEIGHT (KGS/100)
6	110	11
6	110	11
6	110	258
8	110	20
8	110	20
8	110	264
10	125	28
10	125	28
10	125	311
12	125	43
12	125	43
12	125	324
16	170	100
16	170	100
16	170	427
20	200	160
20	200	160
20	200	490
24	255	280
24	255	280
24	255	630



FORGED TURN BUCKLE

W.L.L (TONNES)	A (IN)	TAKE UP (IN)	WEIGHT (KG)
1	1/2	12	1.5
1.2	5/8	12	2.56
2.2	3/4	18	3.65
5	1	18	8.95
6	1 1/4	24	13
8.5	1 1/2	24	18.4
10	1 3/4	24	28



RIGGING EQUIPMENT



D SHACKLE SCREW PIN

SIZE inch	W.L.L. KGS	PIN DIA. inch	I.L. inch	N.W. lbs
1/4	1/2	5/16	7/8	0.11
5/16	3/4	3/8	1-1/32	0.17
3/8	1	7/16	1-1/4	0.24
7/16	1-1/2	1/2	1-7/16	0.40
1/2	2	5/8	1-5/8	0.59
5/8	3-1/4	3/4	2	1.21
3/4	4-3/4	7/8	2-3/8	2.25
7/8	6-1/2	1	2-13/16	3.16
1	8-1/2	1-1/8	3-3/16	4.47
1-1/8	9-1/2	1-1/4	3-9/16	6.75
1-1/4	12	1-3/8	3-15/16	9.06
1-3/8	13-1/2	1-1/2	4-3/8	11.60
1-1/2	17	1-3/4	4-13/16	15.95
1-3/4	25	2	5-3/4	26.75
2	35	2-1/4	6-3/4	42.31
2-1/2	55	2-3/4	8	71.75



SHACKLE BOLT/NUT

W.L.L. TONS	A MM	B MM	C MM	D BOW MM	D DEE MM	2E MM	NET WEIGHT (KG/NOS)
0.5	7	8	12	29	-	20	0.07
0.75	9	10	13.5	32	-	21	0.13
1	10	11	17	36.5	-	26	0.17
1.5	11	12	18.5	43	-	29	0.25
2	13.5	16	22	51	43	32	0.44
3.25	16	19	27	64	51	43	0.79
4.75	19	22	31	76	59	51	1.26
6.5	22	25	36	83	73	58	1.88
8.5	25	28	43	95	85	68	2.78
9.5	28	32	47	108	90	75	3.87
12	32	35	51	115	94	83	5.26
13.5	35	38	57	133	115	92	6.94
17	38	42	60	146	127	99	8.79
25	45	50	74	178	149	126	14.99
35	50	57	83	197	171	138	20.65
55	65	70	105	254	203	180	41.05
85	75	80	127	330	230	190	62.24
120	90	95	146	381	267	238	110



RIGGING EQUIPMENT



STAINLESS STEEL TWIST SHACKLE

SIZE mm	W.L.L. kgs	O.L. mm	N.W kg
5/32	90	1-1/32	0.017
3/16	100	1-1/4	0.020
1/4	150	1-9/16	0.034
5/16	250	1-7/8	0.080
3/8	500	2-7/16	0.150
1/2	600	2-7/8	0.240



ROLLER SHACKLE

SIZE mm	W.L.L. ton	N.W. kg
25	3.0	2.5
28	4.0	3.7
32	5.0	5.8



RIGGING EQUIPMENT



GRADE 80 CLEVIS GRAB HOOK

CHAIN SIZE inch	W.L.L. lbs	DIMENSIONS (inch)				N.W. lbs
		A	B	C	H	
1/4	3500	0.37	1.10	2.56	0.38	0.62
3/8	7100	0.47	1.32	3.25	0.50	1.26
1/2	12000	0.57	1.61	4.19	0.62	3.45
5/8	18100	0.81	2.05	5.03	0.75	5.64
3/4	28300	0.88	2.71	5.95	0.88	10.69



LARGE BOW SHACKLE

SIZE inch	W.L.L. KGS	I.L. inch	N.W. lbs
5	80	19	0.019
6	100	25	0.034
8	200	32	0.070
10	320	38	0.130
12	520	51	0.260
16	200	64	0.500
20	1100	76	0.800
22	1500	89	1.300
25	2100	100	2.000
28	3000	115	3.100
32	3500	127	4.300
38	5000	152	7.000
45	7000	180	12.500
52	8000	200	17.500



RIGGING EQUIPMENT



DIE CASTING DOUBLE PULLEY WITH SWIVEL, ZINC ALLOY, ZINC PLATED OR NICKEL PLATED

SIZE. inch	ROPE DIA. inch	N.W. kg/100PCS
1/2	1/8	4.0
3/2	3/16	4.8
1	1/4	8.0
1-1/4	5/16	17.0
1-1/2	7/16	17.5



PLASTIC CHAIN

SIZE. mm	WIRE mm	I.L. mm	I.W. mm	W.L.L. KN	M.B.S kg
6	ø6	28	7.3	6.1	10.98
8	ø8	36	10.0	12.5	22.5
10	ø10	63	14.0	14.0	25.2



RIGGING EQUIPMENT



DIE CASTING SWIVEL SNAP, ZINC ALLOY, NICKEL PLATED

SIZE. mm	O.L. mm	N.W. kg/100PCS
3/8	51	1.00
1/2	51	1.10



DIE CASTING SINGLE PULLEY WITH SWIVEL

SIZE. inch	ROPE DIA. inch	N.W. kg/100PCS
1/2	1/8	2.3
3/2	3/16	2.4
1	1/4	4.8
1-1/4	5/16	11.0
1-1/2	3/8	11.5
2	7/16	21.0



RIGGING EQUIPMENT



DROP FORGED WIRE ROPE CLIP, H.D.G

SIZE inch	N.W. lbs/100pcs
1/8	6.00
3/16	10.00
1/4	20.00
5/16	30.00
3/8	47.00
7/16	76.00
1/2	80.00
9/16	104.00
5/8	106.00
3/4	150.00
7/8	212.00
1	260.00
1-1/8	290.00
1-1/4	430.00
1-3/8	460.00
1-1/2	540.00
1-5/8	700.00
1-3/4	925.00
2	1300.00
2-1/4	1600.00



STAINLESS STEEL STANDARD WIRE ROPE THIMBLE

SIZE inch	N.W. kg
1/8	0.015
3/16	0.015
1/4	0.015
5/16	0.019
3/8	0.031
1/2	0.060
5/8	0.167
3/4	0.262
7/8	0.403
1	0.476



RIGGING EQUIPMENT



DIN 741 MALLEABLE WIRE ROPE CLIP WITH GROOVE, ZINC PLATED

SIZE inch	N.W. lbs/100pcs
3	1.40
5	1.50
6	2.10
8	4.10
10	6.80
11	7.20
12	10.00
13	13.00
14	13.50
16	21.00
19	28.00
22	40.00
26	44.00
30	66.00
34	85.00
40	104.00



STAINLESS STEEL WIRE ROPE CLIP

SIZE inch	N.W. kg
1/8	0.023
3/16	0.041
1/4	0.083
5/16	0.142
9/8	0.193
7/16	0.325
1/2	0.345
9/16	0.450
5/8	0.460
3/4	0.690
7/8	1.110
1	1.50



RIGGING EQUIPMENT



STANDARD TYPE THIMBLE ZINC PLATED

SIZE inch	N.W. kg/100pcs
6	2.30
8	4.50
10	8.90
12	10.80
14	13.00
16	17.30
20	21.30
22	30.00
24	58.80
28	91.70



U – BOLT, ZINC PLATED

SIZE inch	O.L. mm	RING SIZE mm	N.W. kg
1/4	113	20	3.15
1/4		25	3.55
1/4		32	4.10
5/16	113	38	8.30
5/16		50	9.50
5/16		60	10.70



RIGGING EQUIPMENT



RING BOLT, IRON THREAD, ZINC PLATED

SIZE inch	O.L. mm	RING SIZE mm	N.W. kg
5/16	90	7X50	0.13



RING BOLT, WITH ONE NUT, ZINC PLATED

SIZE inch	O.L. mm	RING SIZE mm	N.W. kg
5/16	113	7X50	0.13



EYE NUT DIN 582, ZP

SIZE inch	W.L.L. KGS	N.W. KG/100pcs
6	70	4.90
8	140	5.00
10	230	9.00
12	340	16.00
16	700	24.50
20	1200	36.00
22	1500	58.00
24	1800	72.00
27	2500	80.00
30	3600	132.00
33	4300	130.00
36	5100	208.00



RIGGING EQUIPMENT



EYE NUT FORGED CARBON STEEL, SELF COLORED OR HOT DIPPED GALVANIZED

STOCK SIZE inch	STD.TAP SIZE inch	W.L.L. lbs	O.L. inch	N.W. lbs
1/4	1/4	520	1-11/16	0.09
1/4	5/16	850	1-11/16	0.09
5/16	3/8	1250	2-1/16	0.18
3/8	7/16	1700	2-1/2	0.29
3/8	1/2	2250	2-1/2	0.28
1/2	5/8	3600	3-3/16	0.58
5/8	3/4	5200	3-7/8	1.00
3/4	7/8	7200	4-5/16	1.70
7/8	1	10000	5	2.75
7/8	1-1/8	12300	5	2.75
1	1-1/4	15500	5-3/4	3.85
1-1/8	1-3/8	18500	6-1/4	5.00
1-1/4	1-1/2	22500	6-3/4	6.70
1-1/2	2	40000	10	18.70



EYE SCREW DIN 580, ZP

SIZE inch	W.L.L. KGS	N.W. KG/100pcs
6	70	5.00
8	140	6.00
10	230	11.00
12	340	18.00
14	490	28.00
16	700	28.50
20	1200	45.00
22	1500	67.00
24	1800	87.00
27	2500	88.00
30	3600	166.00
33	4300	172.00
36	5100	265.00



RIGGING EQUIPMENT



FIST GRIP CLIPS

SIZE mm	b mm	h1 mm	h2 mm	l mm
6	27	18	34	33
9	32	24	46	36
12	40	30	56	47
16	47	35	67	55
20	54	46	89	63
25	69	51	110	72



DELTA SHAPED QUICK LINK, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
3.5	200	0.92
5.0	330	2.30
6.0	550	4.02
8.0	1210	8.97
10.0	1320	15.52
12.0	2425	28.75
14.0	3970	40.25
16.0	4850	57.50



"S" LIGHT HOOK, ZINC PLATED

SIZE mm	N.W. kg/100pcs
3	0.31
4	0.88
5	1.06
6	4.66
7	6.00
8	6.75
10	12.60
12	15.00



RIGGING EQUIPMENT



STAINLESS STEEL "C" LINK

SIZE mm	I.L. mm	N.W. kg/100pcs
6	24	0.017
8	32	0.040
9	33	0.055
10	35	0.075
12	48	0.126
13	52	0.166
14	55	0.210
16	64	0.317
19	76	0.532
20	76	0.640
22	88	0.820
25	100	1.300
28	114	1.610
32	132	2.500



QUICK LINK, ZINC PLATED

SIZE inch	W.L.L. lbs	N.W. kg/100pcs
3.0	350	0.70
3.5	400	0.80
4.0	500	1.20
5.0	660	2.00
6.0	880	3.50
7.0	1300	6.50
8.0	1760	7.80
9.0	2200	11.00
10.0	2640	13.50
11.0	3000	18.50
12.0	3300	25.00
14.0	6100	35.00
16.0	7500	50.00



RIGGING EQUIPMENT



HAIR PIN, SINGLE OR DOUBLE TYPE, ZINC PLATED

SIZE inch	N.W. kg/100pcs
2.0	0.25
2.50	0.40
3.0	0.60
3.7	1.10
4.0	1.95
5.0	2.50
6.0	2.80



STAINLESS STEEL WELDED "D" RING

SIZE mm	I.W.OF EYE mm	N.W. kg/100pcs
4	25	0.90
4	30	1.00
4	35	1.20
4	40	1.30
5	25	1.40
5	30	1.60
5	35	1.90
5	40	2.10
5	45	2.30
5	50	2.50
6	30	2.50
6	35	2.80
6	40	3.10
6	45	3.50
6	50	3.80
6	55	4.40
6	60	4.70
8	50	7.20
8	60	8.20



RIGGING EQUIPMENT



WELDED ROUND RING, ZINC PLATED

SIZE inch	N.W. kg/100pcs
3X25	0.50
4X25	0.91
4X30	1.07
4X40	1.39
5X30	1.73
5X40	2.23
5X50	2.58
6X30	2.72
6X40	3.27
6X50	3.99
6X60	4.69
7X35	4.20
8X40	6.06
8X50	7.32
10X50	11.85
10X70	15.80
12X60	20.50
12X100	31.80



RECTANGULAR SNAP HOOK, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
5X50	220	1.75
6X60	260	2.55
8X80	500	5.70
10X100	770	13.60
11X120	950	18.50



RIGGING EQUIPMENT



SNAP HOOK WITH SCREW, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
4X40	200	1.50
5X50	220	2.00
6X60	260	3.00
7X70	400	5.00
8X80	500	7.50
9X90	550	9.80
10X100	770	16.00
11X120	990	21.00
12X140	1200	27.00
13X160	1400	36.00



SNAP HOOK WITH EYELET & SCREW, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg100pcs
5X50	220	2.10
6X60	260	3.22
7X70	400	5.04
8X80	500	7.70
9X90	550	9.90
10X100	770	16.20
11X120	990	22.00
12X140	1200	28.00
13X160	1400	37.00



RIGGING EQUIPMENT



SNAP HOOK, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
4X40	200	1.20
5X50	220	1.80
6X60	260	2.80
7X70	400	4.50
8X80	500	7.00
9X90	550	9.00
10X100	770	14.40
11X120	990	19.20
12X140	1200	27.00
13X160	1400	35.00
14X180	1600	50.00



SNAP HOOK WITH EYELET, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg100pcs
4X40	200	1.50
5X50	220	2.00
6X60	260	3.00
7X70	400	5.00
8X80	500	7.50
9X90	550	9.80
10X100	770	16.00
11X120	990	21.00
12X140	1200	27.50
13X160	1400	35.80





ALUMINIUM SNAP HOOK, NORMAL TYPE

SIZE mm	N.W. kg/100pcs
5X50	0.5
6X60	0.9
7X70	1.6
8X80	2.5



ALUMINIUM SNAP HOOK, "D" TYPE

SIZE mm	N.W. kg/100pcs
5X50	0.5
6X60	0.9
7X70	1.6
8X80	2.5



RIGGING EQUIPMENT



PLOYTHENE (PE) AND POLYPROPYLENE (PP) ROPE 3 STRANDS

SIZE DIA	CONSTRUCTION	LENGTH OF COIL (YARDS)	STD.BREAKING LOAD (KGF)
6 MM	3 STRAND	200	610.00
8 MM	3 STRAND	200	1020.00
10 MM	3 STRAND	200	1530.00
12 MM	3 STRAND	200	2160.00
14 MM	3 STRAND	200	2850.00
16 MM	3 STRAND	200	3820.00
18 MM	3 STRAND	200	4590.00
20 MM	3 STRAND	200	5710.00
22 MM	3 STRAND	200	6830.00
24 MM	3 STRAND	200	8160.00
26 MM	3 STRAND	200	9170.00
28 MM	3 STRAND	200	10810.00
30 MM	3 STRAND	200	12030.00
32 MM	3 STRAND	200	13460.00
34 MM	8 STRAND	200	17330.00
36 MM	8 STRAND	200	19000.00
38 MM	8 STRAND	200	20390.00
40 MM	8 STRAND	200	29200.00
50 MM	8 STRAND	200	44100.00



SISAL ROPE, 3 STRANDS

SIZE mm	M.B.S kgs	N.W. kg/coil	LENGTH m/coil
6	300	7	220
8	425	12	220
10	560	15	220
12	840	23	220
16	1590	40	220
18	1890	48	220
20	2510	60	220



RIGGING EQUIPMENT



EYE SELF LOCKING SAFETY HOOK

CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)
8	2.00
10	3.15
13	5.30
16	8.00
20	12.5
22	15.00



SWIVEL SELF LOCKING SAFETY HOOK

CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)	NET WEIGHT (KGS/EACH)
8	2.00	1.1
10	3.15	2.0
13	5.30	4.0
16	8.00	7.3





CONTACT US



+971 55 758 1064



ahm-bmt@outlook.com



mohammed@ahm-bmt.com



Shop no.36, Naif Bazaar Bldg,
Nakheel, Deira, Dubai, UAE

**SCAN THE QR
FOR WHATSAPP**

